

S-100 SERIES DOORS


LUXURIOUS, AFFORDABLE ENTRANCE DOORS

Spitfire S-100 Series Doors are extremely secure, with Passive House level thermal values. By combining world class engineering and design, and utilising the highest quality, perfectly suited steel and aluminium, our bespoke doors can be manufactured to sizes much wider and higher than a composite door.







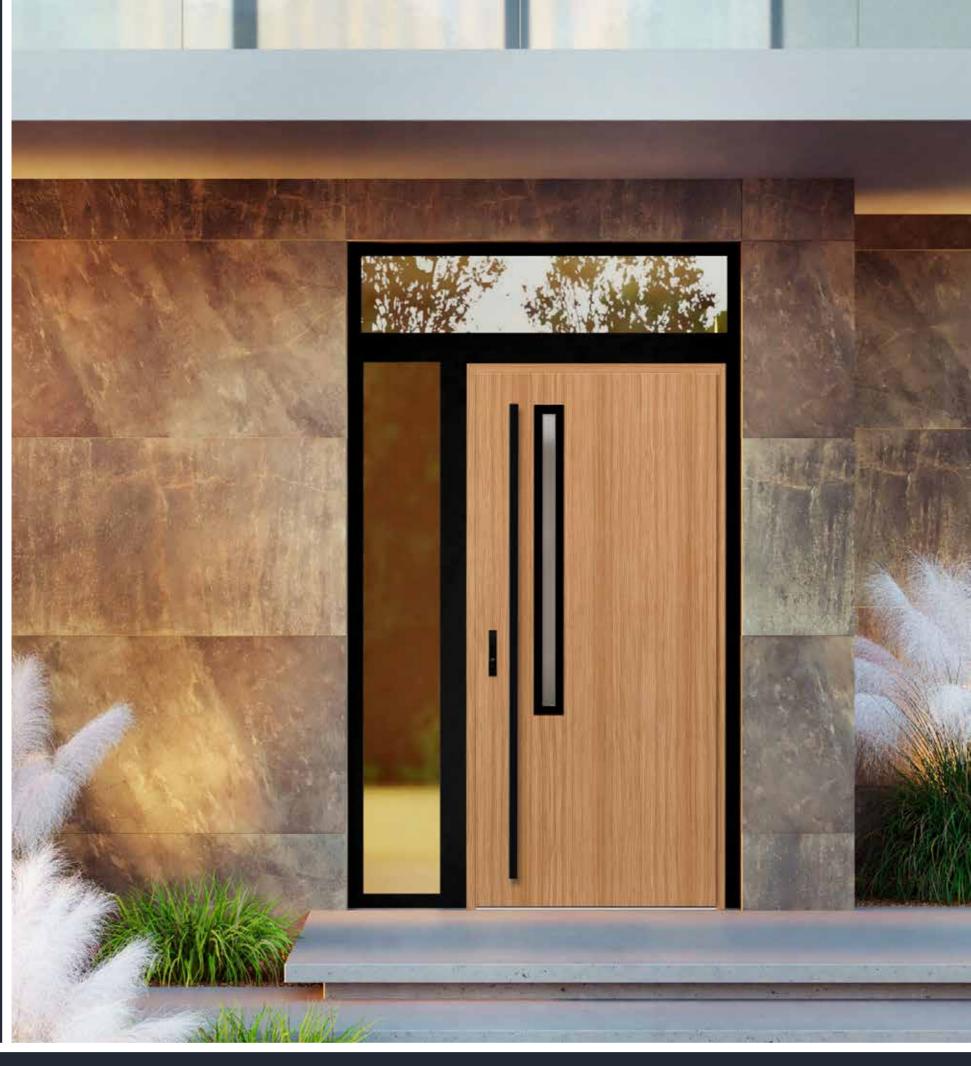




S1- Model 2





GLASS FINISHES

The external glass is black and is flush with the door sash, whilst internally the glass is available in a choice of seven designs and is complemented by a steel decorative door panel which is painted black.








S2- Model 1









S2-Model 5



INOX



S3-Model 6*





*Grooves on both the inside and outside of the door sash






S5-Model 6







S5-Model 5*



S6-Model 5



* S6 Model 5 will incur an additional cost, please request a quote from our Customer Service team.

S6 Model 5 features back to back spacer and face mounted steel bars as standard.








S7-Model 3



25mm wide Steel or Black inlay. Available on one side or on both sides of the door.

S7-Model 4

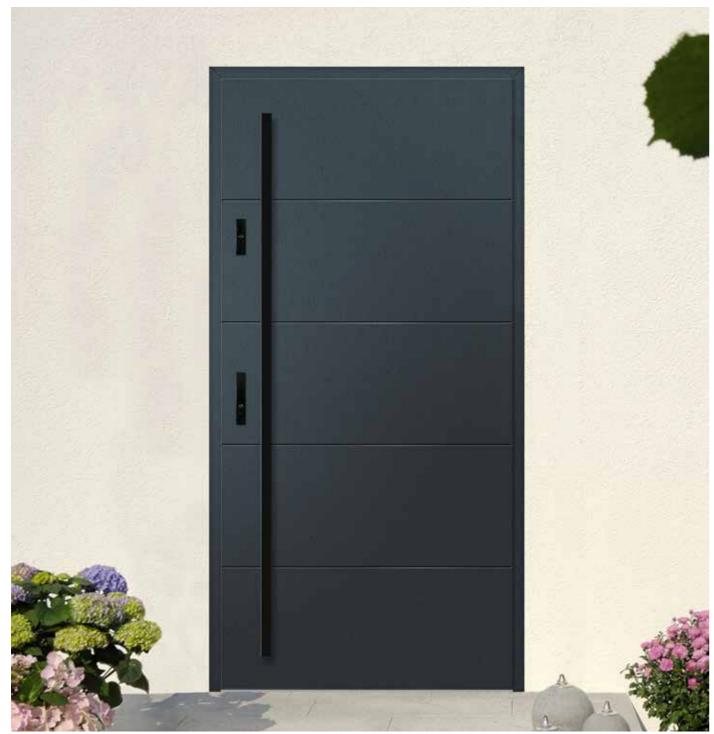

S8-Model 3





S8-Model 4*

Decorative CNC groove within the door sash is 10mm wide x 2mm deep

* S8-Model 4 minimum width 908 mm





S9-Model 2



S12-Model 4





A decorative CNC wide groove within the door sash, measuring 25mm wide x 2mm deep

S12-Model 3

S12-Model 4



S14-Model 1



Steel raised Décor creates a 3D effect in a choice of Black or Inox, and is replicated internally and externally.







S14-Model 1





ULTRA LOW U-VALUES

S-100 solid door models exceed Passive House standards with an incredibly low U-Value of just 0.77 W/ m²K. Glazed doors are 0.88 W/m²K.



COLOURS

Choose from 18 luxury "Solar Shield" finishes.
Dual colours also available.

4 Dogbolts for Security are fitted in the outerframe / sash



DOOR SIZES

S-100 single doors can be manufactured in sizes up to 1208mm wide and 2476mm high.



GLASS

Triple glazing is provided in all glazed designs, including toplights and sidelights.



RC2 & PAS 24 SECURITY AS STANDARD

For peace of mind, S-100 front doors conform to RC2 and PAS24 security.



WEATHER TEST RESULTS


Air Permeability Class 4
Wind Load Class 4
Deflection Class C
Watertight Class 3

Note

Minimum door width 778mm. Maximum door width 1208mm. Sizes are available in 10mm increments e.g. 788mm, 798mm, 808mm. Minimum door height 1806mm. Maximum door height 2476mm. Sizes are available in 10mm increments e.g. 1816mm, 1826mm, 1836mm



S15-Model 2



S15-Model 2



S17-Model 2



S17-Model 2



S18-Model 4*



* S18 Model 4 will incur an additional cost, please request a quote from our Customer Service team.

S18-Model 3



S19-Model 1



S19-Model 1





S20- Model 2



S22-Model 3



S24-Model 10



S24-Model 1 S24-Model 2



S24 Model 7 features 2mm thick horizontal bars to match the Steel surround.



SPITFIRE S-100 COLLECTION



^{*}S1 design features black glass externally and a slim steel trim internally.




S-100 entrance doors combine the security and stability of a thermally enhanced steel door leaf and the reliability of an aluminium frame. All steel and aluminium materials are wrapped in Renolit Exofol, a high-performance surface treatment, which has Solar Shield Technology embedded.

Renolit reflects infrared radiation, substantially reducing the build-up of heat in the doors exterior, so your door will retain its geometry and exact fit. You are free to choose from 18 Renolit finishes and we can manufacture dual colour doors (internal/external).

18 Renolit Finishes



^{*}The Natural Oak grain can be vertical or horizontal on the door slab, but vertical only on the frame.

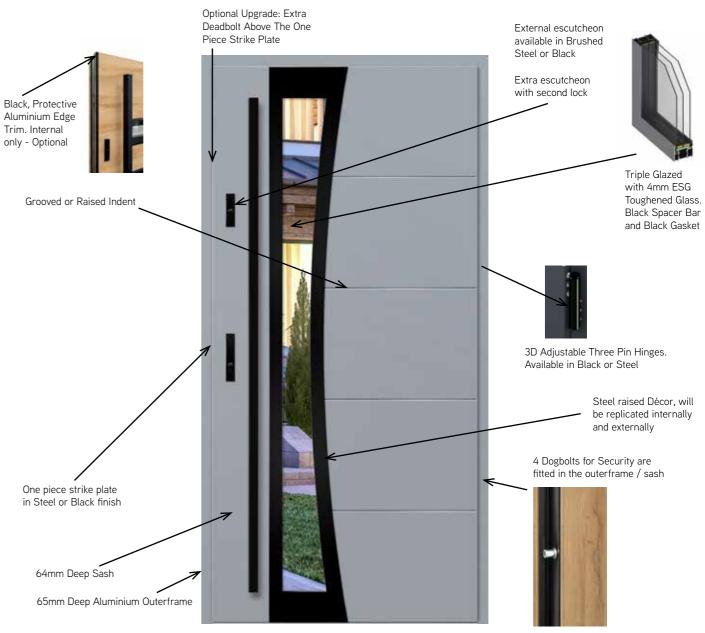

As Standard

- Aluminium Outerframe
- 64mm deep door sash with high security steel skin, 65mm deep frame
- RC2 and PAS 24 Security
- 0.77 W/m²K U Value on Solid Designs. 0.88 W/m²K on Glazed Designs
- Multi-point lock with two hooks, two horizontal bolts, one deadbolt and a latch
- 3D adjustable three pin hinges. Available in Black or Steel
- Lever handle internally in Black or Steel
- Round or Square pullbar externally in Black or Steel
- Maximum single door size 1208mm x 2476mm
- 20mm Warm low threshold
- 4 Hinge security dog bolts
- Doors with glazing are triple glazed
- Three keys
- Any Steel décor will be replicated on the inside and outside of the front door
- One piece strike plate with Steel finish


- 15.5mm hinge clearance
- Doors weigh circa 90 Kgs
- Drop down weatherseal provides improved thermal insulation and weathering


Optional Extras

- Thumbturn internally
- Black or Steel protective aluminium edge trim cover internally
- Additional deadbolt locking point towards top of door Keyed alike
- Triple glazed side lights or top lights
- Aluminium corner post
- Day latch
- Spyhole in Black or Steel
- 28mm Aluminium Add-on Extension
- 30 x 150mm uPVC cill or 25 x 150mm Aluminium cill, Black textured, Anthracite smooth or White textured
- 25mm high Cill Anodised Silver
- Five Keys
- Black Strike Plate

HANDLES AND ACCESSORIES







GLASS DESIGNS

















Triple Glazed with 4mm ESG Toughened Glass. Black Spacer Bar and Black Gasket in all glazing





www.spitfiredoors.co.uk | 01625 412570 | enquiries@spitfiredoors.co.uk 5 Snape Road, Macclesfield, Cheshire, SK10 2NZ